


DURABLE EXCELLENCE AND COMFORT BY NATURE

PRODUCT DATA SHEET

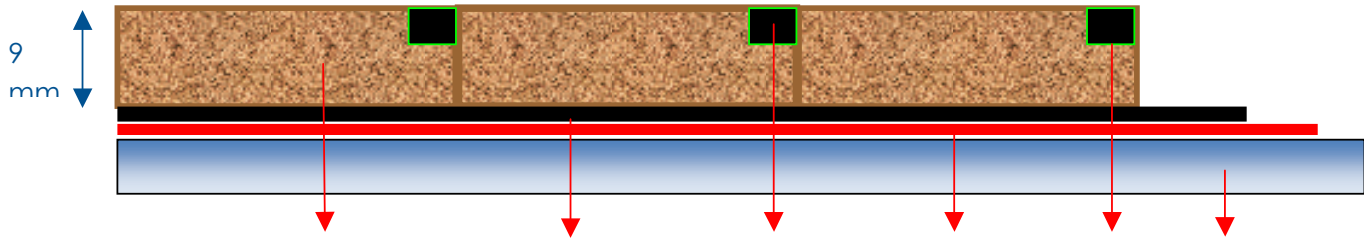

MARINEDECK® planks/sheet - Adhesive - Deck Caulk - Prep M or Prep P – Prep P - Ships deck

Sizes				
Plank	article code	length	width	thickness
Planks	032.1000.8	1880 mm (74")	36 mm (1 ½")	9 mm (0,35")
Planks	032.1000.9	1880 mm (74")	50 mm (2 ")	9 mm (0,35")
Margin planks	032.1001.0	1880 mm (74")	75 mm (3")	9 mm (0,35")
Fishing/king plank	032.1001.1	1880 mm (74")	125 mm (5")	9 mm (0,35")
Sheet*	032.1001.2	1880 mm (74")	410 mm (16")	9 mm (0,35")
Sheet*	032.1001.3	1880 mm (74")	500 mm (20")	9 mm (0,35")

*Sheet is also standard available in 6 mm (1/4 ")

E-modulus	± 110 N/mm ²
Compression strength	± 12 N/mm ²
Tensile strength	± 5 N/mm ²
Elongation at braking point	± 10%
Shore hardness	± 40 shore D
Coefficient of linear expansion	1,3x10/m-5K/m-1
Specific gravity	± 0,5
Coefficient of thermal conductivity**	0,057 W/m.K
Hydrolysis resistance salt water	after 1 year immersion in no detrimental effect
Wear resistance to Taber 1000 rotations CS 17;1000g	0,0386 g
Water absorption	less than 5% at 20° C
Impact sound insulation acc. to ISO 717/2	20 dB
Weight	4,5 kos/m ²
**Specific information	see "specific information about thermal conductivity on our web site"

MARINEDECK® exterior is non-flame supporting and flame extinguishing

HIGH PERFORMANCE COMPOSITE SHIPS DECKS OF ECO CORK