


ALL OTHER PLYWOOD TO TIMBER JOINTS GLUED  
AND NAILED WITH 1.2 x 20 mm NAILS SPACED 50 mm

ALL NAILS OF BRASS. ALL SCREWS OF BRASS  
OR STAINLESS STEEL

ALL PLYWOOD TO PLYWOOD JOINTS WITHOUT TIMBER, FIRST STITCHED SIDES WITH 1-1.5 mm COPPER WIRE, THEN TAPED BOTH SIDES WITH EPOXY OR POLYESTER RESIN AND ONE LAYER OF CHOPPED STRAND MAT EACH SIDE. MAT WEIGHT 450 g/m<sup>2</sup>. MAT STRIPS WIDTH 100 mm

AFT SEAT, THWART AND MAST PARTNER TAPED  
TO THE PLANKING UNDERSIDE ONLY

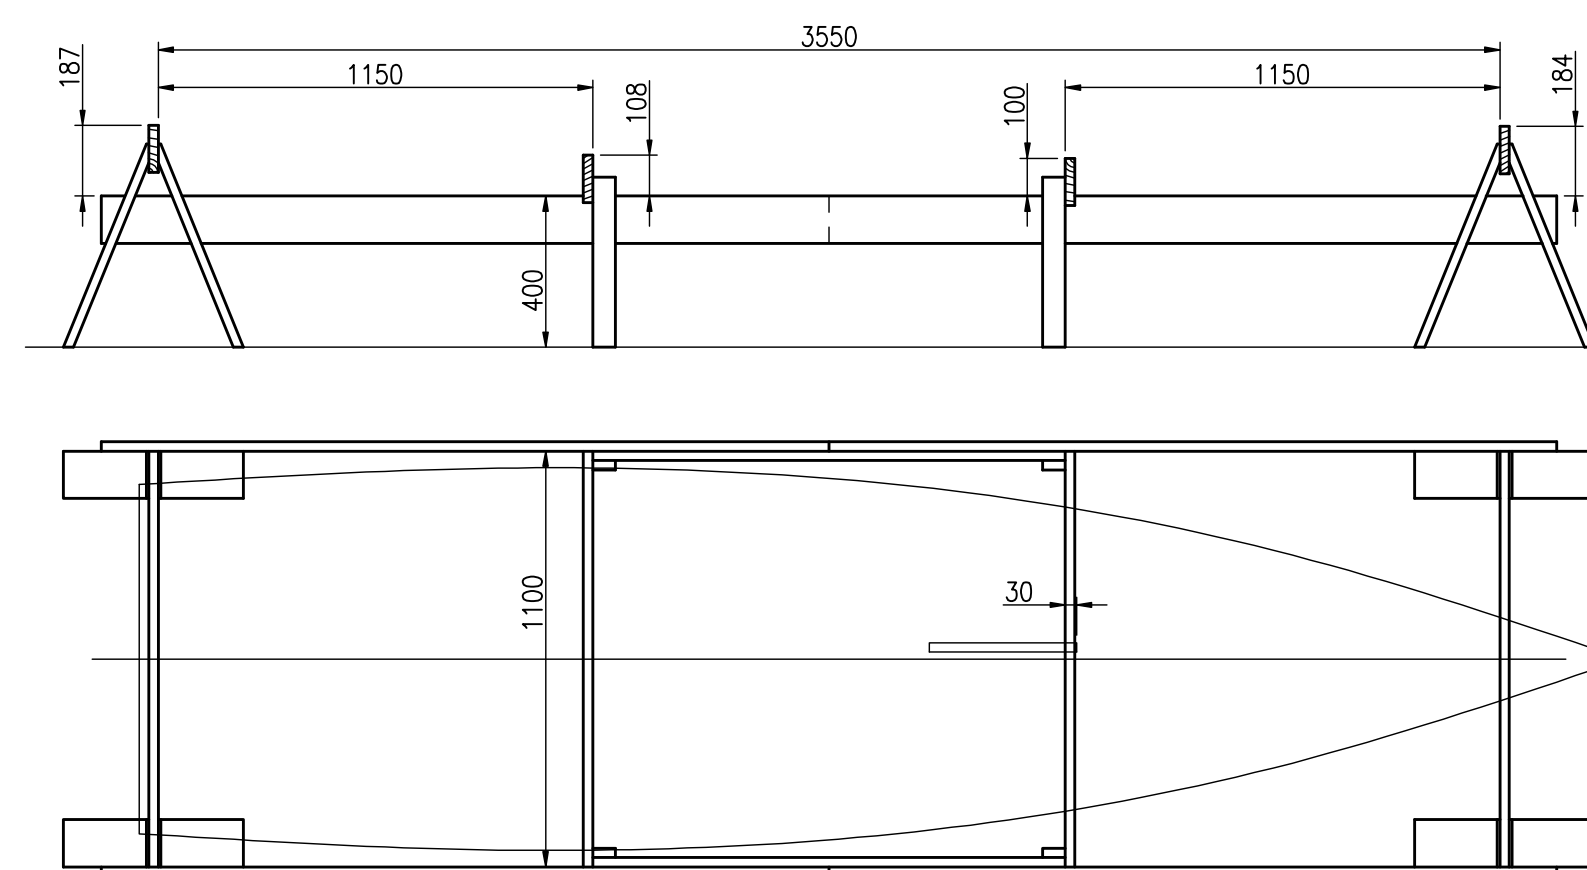

BUILDING STOCK

SCREWED FROM LUMBER OR 22 mm PARTICLEBOARD  
RESAWN INTO 125 mm WIDE PANELS

BOTTOM SET UP ON THE BUILDING STOCK  
AND POSITIONED TO THE FORWARD END OF  
THE DAGGERBOARD CASE SLOT, THEN TEMPORARILY  
FASTENED WITH FOUR SCREWS TO THE STOCK  
AMIDSHIP BEAMS

4.0m HULL CONSTRUCTION  
SHEET 40.3/5, SIZE A1  
SCALE 1:5, 1:10, 1:20

RADOSŁAW WERSZKO  
AUGUST 2006